




MARINE CARE

CARETREAT OXYGEN CONTROL DH

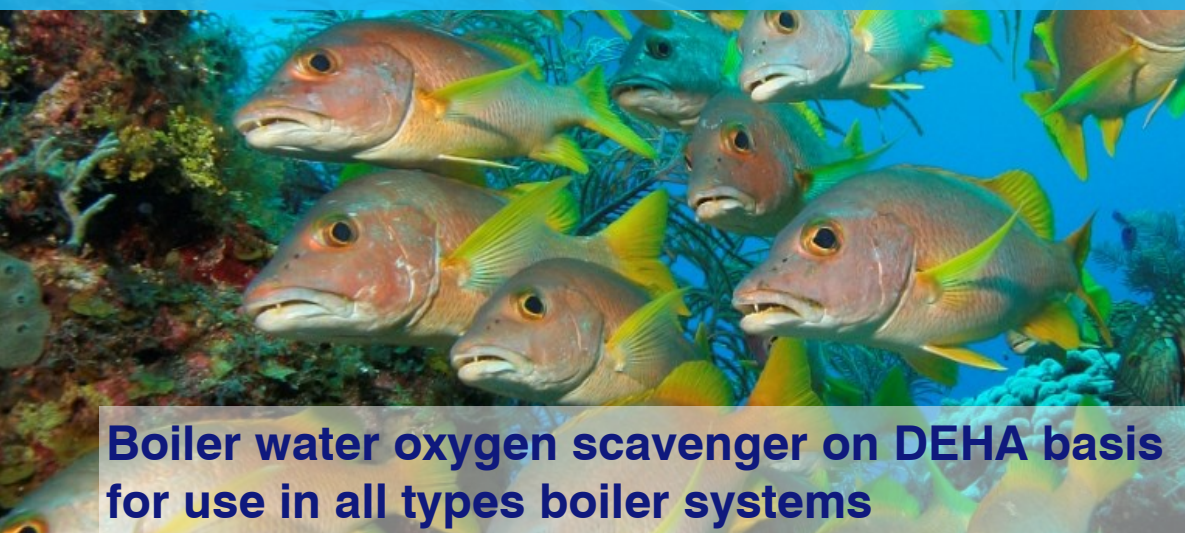

Boiler water oxygen scavenger on DEHA basis for use in all types boiler systems

DESCRIPTION

Caretreat Oxygen Control DH is a concentrated liquid organic amine based product. The product removes oxygen rapidly in the boiler water. Caretreat Oxygen Control DH further prevents corrosion by oxygen and is an excellent passivator of steel surfaces. Caretreat Oxygen Control DH also neutralizes acids that tend to carry over to the condensate system. Caretreat Oxygen Control DH does not form carbon dioxides. Due to its volatility, Caretreat Oxygen Control DH acts as an oxygen scavenger throughout the entire boiler system due to steam carryover and reacts with ferrous metals to form a passivated film of magnetite throughout the boiler system. Caretreat Oxygen Control DH is a safe to use and environmentally friendly product in comparison most of the equivalent oxygen scavengers.

ADVANTAGE

- Prevents corrosion in LP/MP boiler systems (condensate/feedwater/boiler)
- Environmentally safe, non-toxic product
- Simple and accurate testing
- Effective under all operating conditions

APPLICATIONS

Caretreat Oxygen Control DH can be used in any type low, medium and high pressure boiler system. Caretreat Oxygen Control DH can be used in the following systems:

- evaporated
- feedwater
- boiler
- deaerator

DIRECTIONS FOR USE

Standard water treatment:

Caretreat Oxygen Control DH can be added directly to the feed water. We strongly recommend this is done by using a dosing pump. In high pressure boilers it is recommended to dose Caretreat Oxygen Control DH in the deaerator.

- Environmentally friendly
- Low product consumption
- Simple testing
- No (sulfate) deposits
- Prevents corrosion



MARINE CARE BV
Oude Maasweg 35
Port number 4005
3197 KJ Rotterdam Botlek
The Netherlands
T. +31 (0)10 2950342
F. +31 (0)10 2950345
E. operations@marine.care
W. www.marinecare.nl

Revision	3.0	Document number	PDS-08-170
Date of issue	21-05-2025	Page	1 of 2

It is also recommended to continually dose Caretreat Oxygen Control DH in conjunction with other Caretreat boiler water treatment products.

Control limits

The boiler water must meet the following conditions:

p-Alkalinity	: 100-280 ppm CaCO ₃	
Chlorides	: max. 300 ppm Cl ⁻	(Low pressure boilers)
	: max. 100 ppm Cl ⁻	(Medium pressure boilers)
pH	: 9.5 to 10.8	
Conductivity	: 400 to 2000 µS/cm	(Low pressure boilers)
	: 400 to 1000 µS/cm	(Medium pressure boilers)
Phosphate	: 25-45 ppm PO ₄ ³⁻	
OXYGEN CONTROL DH	: 0.1 - 0.3 ppm	

Initial dosage

Caretreat Oxygen Control DH is initially dosed in the feedwater line, based on the amount of dissolved oxygen. Water with a temperature of 60-80 °C has a maximum of 5 ppm dissolved oxygen. To remove 5 ppm of dissolved oxygen 100 ml Caretreat Oxygen Control DH is added to the feedwater system, per tonnage of boiler volume. After dosing and circulation of the boiler water, the concentration of Caretreat Oxygen Control DH is analyzed and should be 0.3 ppm. When the concentration is lower than 0.1 ppm another 25 ml Caretreat Oxygen Control DH is dosed per ton boiler volume.

Daily dosage

The concentration of Caretreat Oxygen Control DH should be analyzed daily and the value should be kept at 0.1-0.3 ppm. Generally dosing of Caretreat Oxygen Control DH is 5-15 ml per day per ton boiler volume.

TEST KIT

Caretreat Oxygen Control DH concentration can be analyzed with the Marine Care Oxygen Control test kit.

DOSING SYSTEMS

Marine Care supplies a complete range of dosing systems, from manual operated systems, to custom built computer operated high tech systems, for every application.

PROPERTIES

Flashpoint	Not applicable
Physical state	Liquid

APPROVALS

IMO Approved

For detailed information on safety and health, please refer to the Material Safety Data Sheet MSDS and/or product label.



MARINE CARE

CARETREAT OXYGEN CONTROL DH

- Environmentally friendly
- Low product consumption
- Simple testing
- No (sulfate) deposits
- Prevents corrosion
- Suitable for every type of boiler type (LP/MP/HP)



MARINE CARE BV
Oude Maasweg 35
Port number 4005
3197 KJ Rotterdam Botlek
The Netherlands
T. +31 (0)10 2950342
F. +31 (0)10 2950345
E. operations@marinecare.nl
W. www.marinecare.nl

Revision	3.0	Document number	PDS-08-170
Date of issue	21-05-2025	Page	2 of 2

This information is based on data that we believe to be accurate and reliable and is intended to be used by persons having the knowledge and skill to apply this product properly. We assume no responsibility for results or damages incurred from their use by the Buyer. No liability (including liability for negligence) will attach to Marine Care or its servants or agents arising out of or in connection with or in relation to this product information.